


CONCRETE BARRIER VERTICAL-FACED 42-INCH


STA 130+06-STA 131+75, RT  
STA 130+15-STA 131+82, LT

① 44" FROM STA 129+86-STA 130+06, RT  
36" FROM STA 131+82-STA 132+02, LT

SECTION B-B

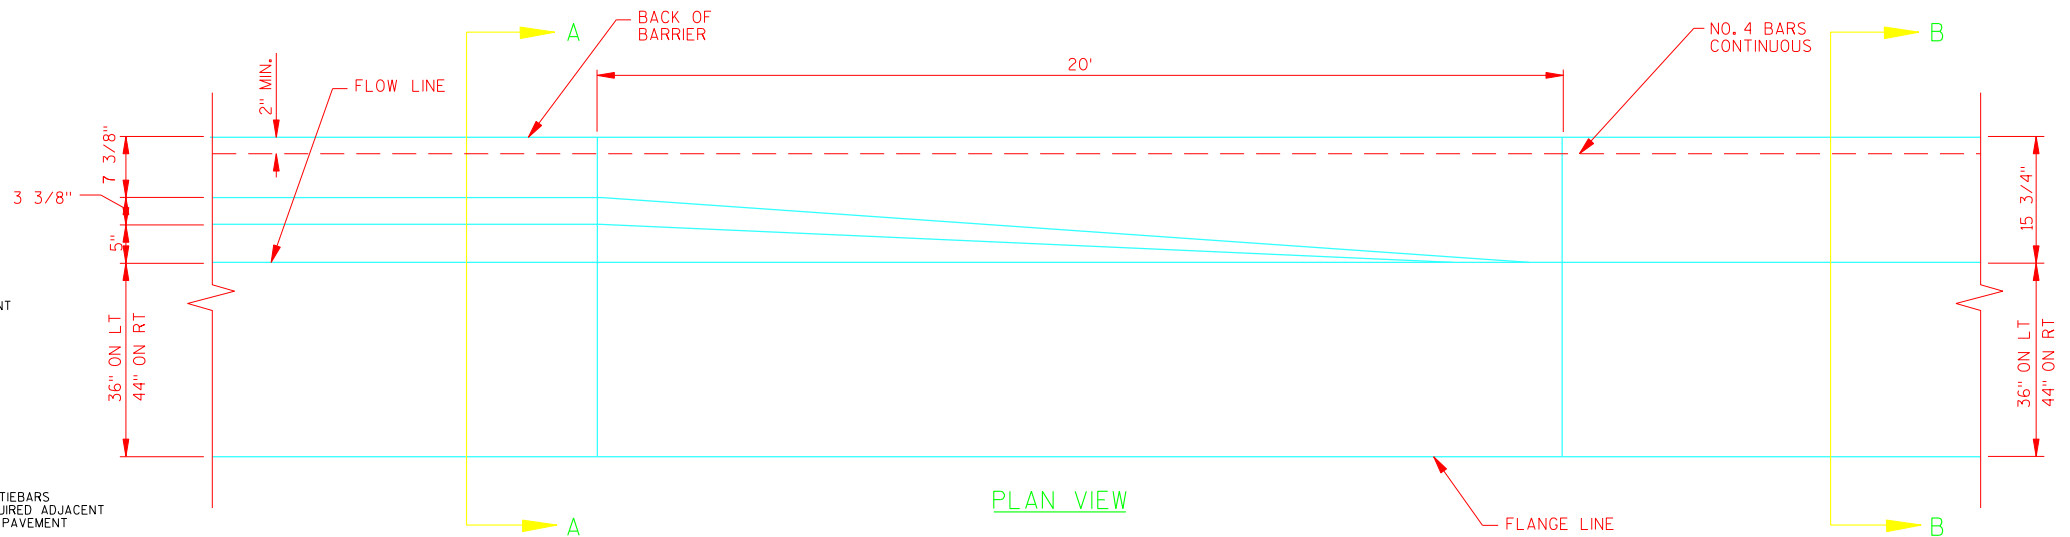

PLAN VIEW

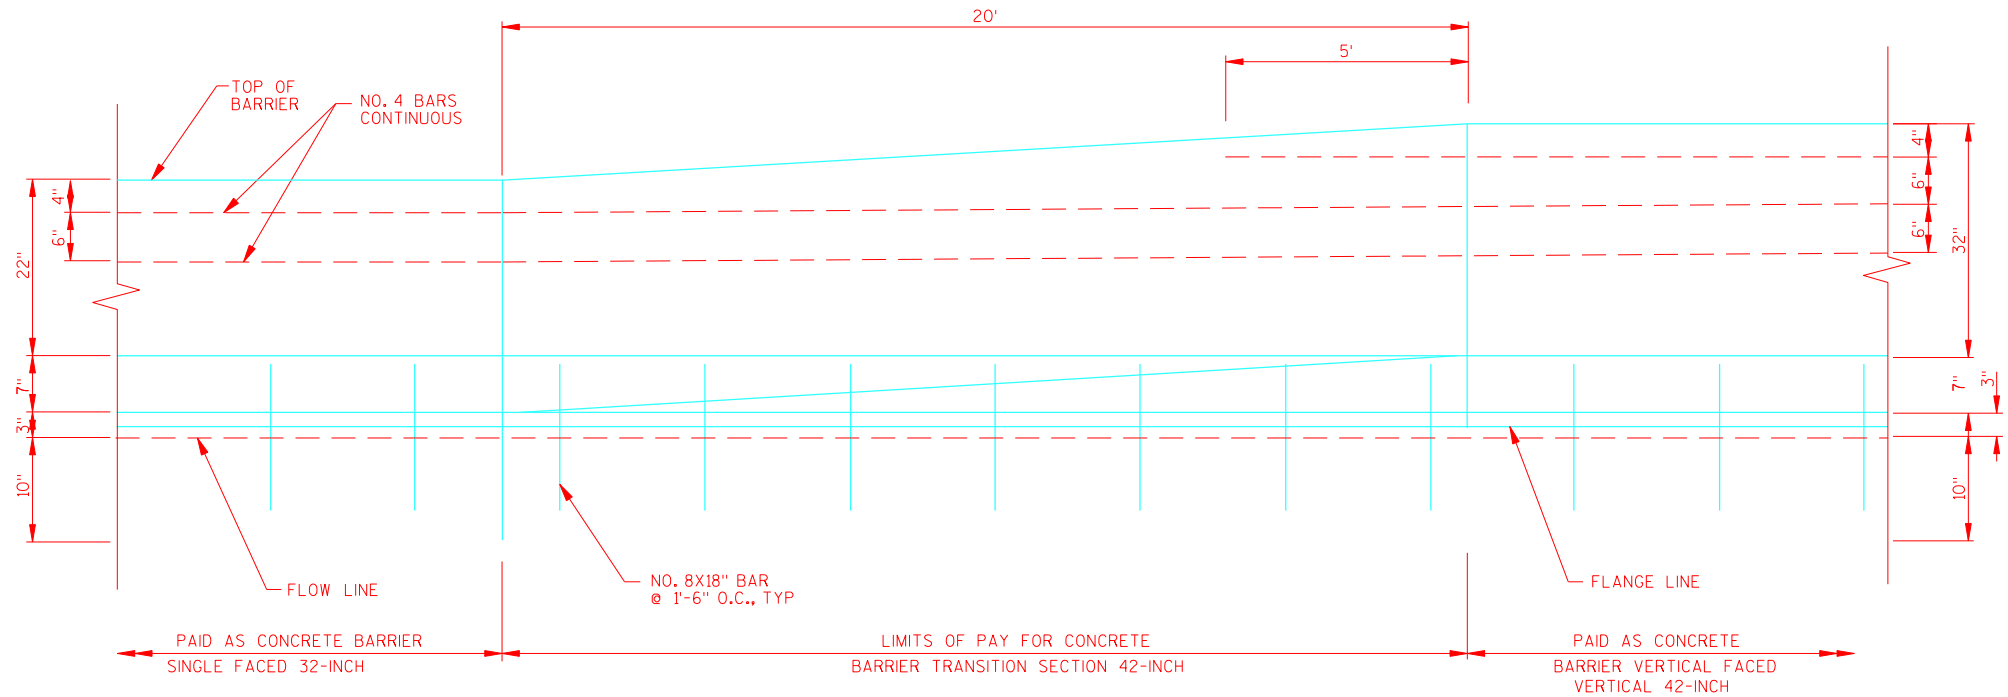

FRONT VIEW

NOTES

- 1) DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS. SEE SDD CONCRETE BARRIER, SINGLE FACED FOR OTHER PERTINENT FEATURES.
- 2) BARRIER SHALL CONSIST OF CAST-IN-PLACE CONSTRUCTION.
- 3) PROVIDE 1/2-INCH CHAMFER AT BARRIER ENDS WITH CONSTRUCTION JOINTS OR WITH EXPANSION JOINTS. PROVIDE 3/4-INCH EXPANSION JOINT MATERIAL AT EXPANSION JOINTS. EXPANSION JOINTS SHALL BE PLACED AT EXISTING EXPANSION JOINTS IN CONCRETE PAVEMENT.

CONCRETE BARRIER TRANSITION SECTION 42-INCH  
TRANSITION FROM 42-INCH VERTICAL SHAPE TO 32-INCH SAFETY SHAPE

STA 129+86-STA 130+06, RT  
STA 131+82-STA 132+02, LT