


Pole-Safe® Skirt  
3003-H14 Aluminum Sheet,  
1.6 mm (1/16") Thick  
(4 panels per Skirt)

See Reverse Side of Page  
for Skirt Sizes and  
Installation Instructions

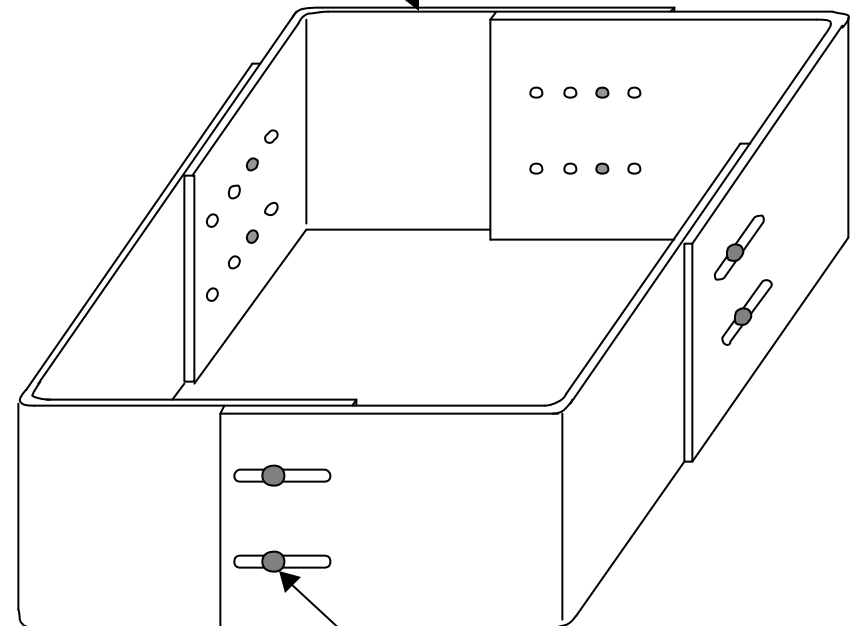

#10 x 10 mm (#10 x 3/8")  
Stainless Steel Sheet Metal  
Screw, Typical, 8 per Skirt

## Pole-Safe® Skirt Details

### Breakaway Support System for Light Poles



20 Jones Street  
New Rochelle, NY 10801  
914-636-1000



**Pole-Safe®**  
Breakaway Support System for Light Poles

**SKIRT INFORMATION**

**Selection Table:**

<b>Pole-Safe® Model No.</b>	<b>Bolt Circle Diameter</b>		<b>Skirt Height (H) mm (in.)</b>
	<b>254 mm to 380 mm (10" to 15")</b>	<b>380 mm to 500 mm (15" to 20")</b>	
	<b>Skirt Part No.</b>	<b>Skirt Part No.</b>	
4062	SPMKDN-4	SPMKDN-4L	146 (5-3/4)
4075	SPMKDN-4	SPMKDN-4L	146 (5-3/4)
4100	SPMKDN-5	SPMKDN-5L	168 (6-5/8)
4125	SPMKDN-5	SPMKDN-5L	168 (6-5/8)
5062	SPMKDN-1	SPMKDN-1L	108 (4-1/4)
5075	SPMKDN-1	SPMKDN-1L	108 (4-1/4)
5100	SPMKDN-2	SPMKDN-2L	127 (5)
5125	SPMKDN-3	SPMKDN-3L	133 (5-1/4)

**Installation Instructions:**

1. Place 4 skirt panels around Pole-Safe Couplings using overlap configuration shown on reverse side of page. All 4 sides of the skirt box should have 2 slots facing outside.
2. Thread 8 sheet metal screws through the outside slots into the closest corresponding holes in the adjacent inside panel.
3. Position panels snug against the Pole-Safe Couplings.
4. Tighten all 8 sheet metal screws.

Transpo Industries, Inc., 20 Jones Street, New Rochelle, NY 10801-6098  
Phone: 914-636-1000 Fax: 914-636-1282  
[www.transpo.com](http://www.transpo.com)