


DETAIL A

NOTES FOR DETAIL "A"


1. SPLICE POINT AT POST 4 OF TYPICAL RUN USING 25 FT W-BEAM PANEL, ADD AN ADDITIONAL 12 FT 6 INCH PANEL BETWEEN POST 4 AND 6.
2. PLACE A SECOND W-BEAM PANEL BEHIND TYPICAL RUN AT POSTS 1 THROUGH 6.
3. MAKE ALL SPLICES AND BOLT RAIL ELEMENTS TOGETHER AS PER GUARDRAIL INSTALLATION REQUIREMENTS.

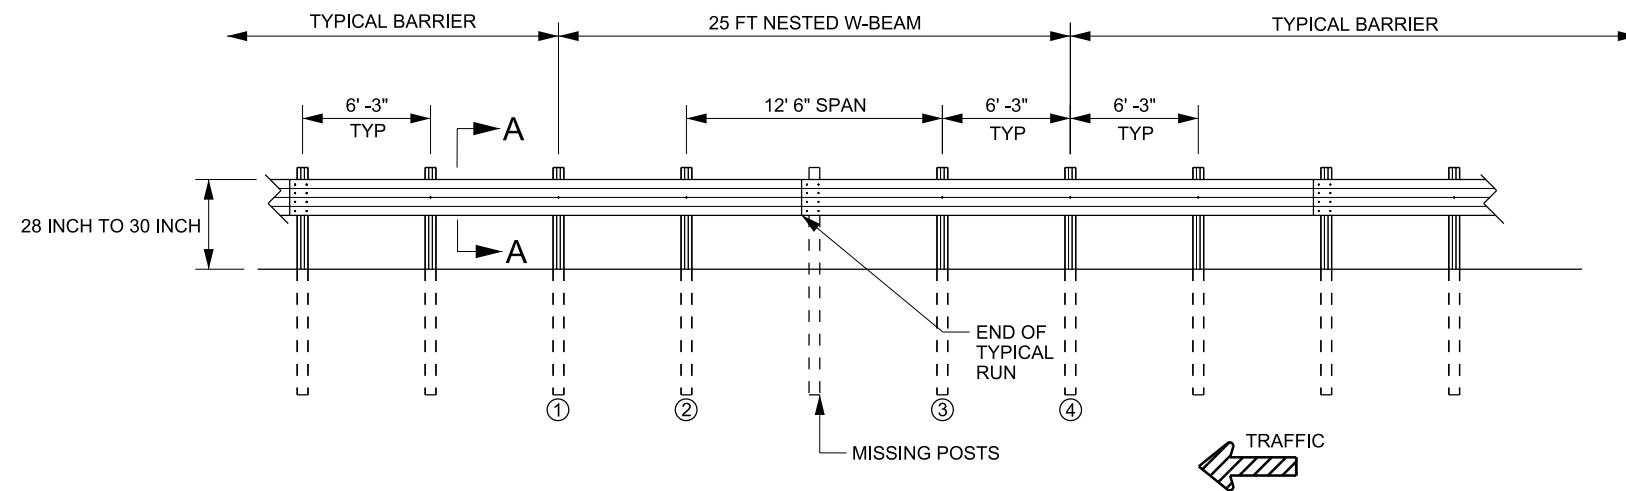

DETAIL B

NOTES FOR DETAIL "B"


1. SPLICE POINT BETWEEN POST 2 AND 3 OF TYPICAL RUN USING 25 FT W-BEAM PANELS.
2. PLACE A SECOND W-BEAM PANEL BEHIND TYPICAL RUN AT POST 1 THROUGH 4.
3. MAKE ALL SPLICES AND BOLT RAIL ELEMENTS TOGETHER AS PER GUARDRAIL INSTALLATION REQUIREMENTS.

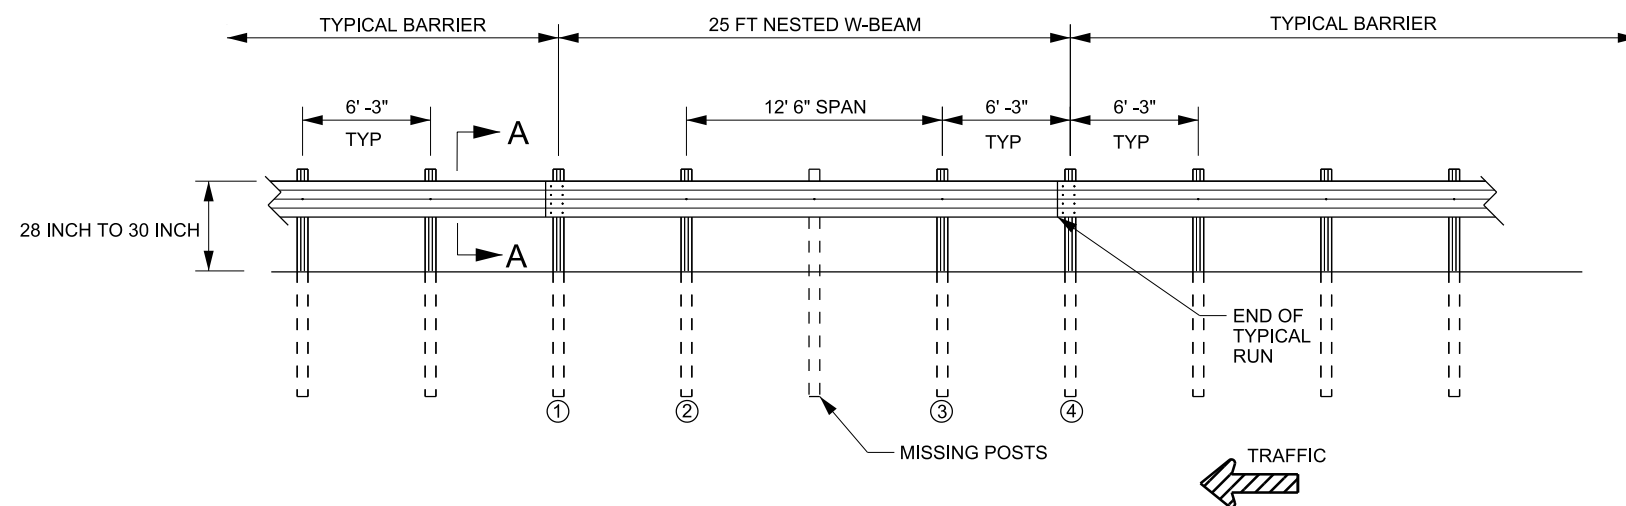

DETAIL C

NOTES FOR DETAIL "C"

1. SPLICE POINT AT POST 1 AND 4 OF TYPICAL RUN USING 25 FT W-BEAM PANELS.
2. PLACE A SECOND W-BEAM PANEL BEHIND TYPICAL RUN AT POST 1 THROUGH 4.
3. MAKE ALL SPLICES AND BOLT RAIL ELEMENTS TOGETHER AS PER GUARDRAIL INSTALLATION REQUIREMENTS.

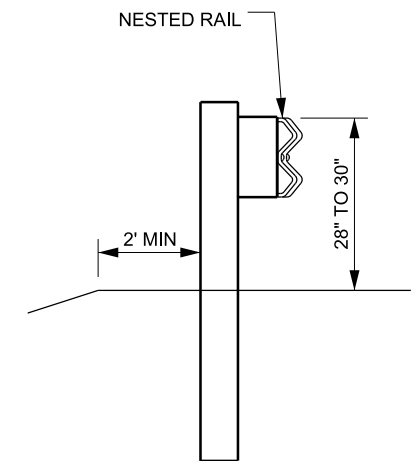

SECTION A-A

NO.	DATE	APPR.	REMARKS

UTAH DEPARTMENT OF TRANSPORTATION
STANDARD DRAWINGS FOR ROAD AND BRIDGE CONSTRUCTION
SALT LAKE CITY, UTAH

RECOMMENDED FOR APPROVAL
[Signature]
CHAIRMAN STANDARDS COMMITTEE
DATE: JAN. 01, 2012

APPROVED
[Signature]
DEPUTY DIRECTOR
DATE: JAN. 01, 2012

W-BEAM GUARDRAIL
NESTED RAIL
12 FT 6 INCH SPAN

STANDARD DRAWING TITLE

STD. DWG. NO.
BA 4H1