



PLAN

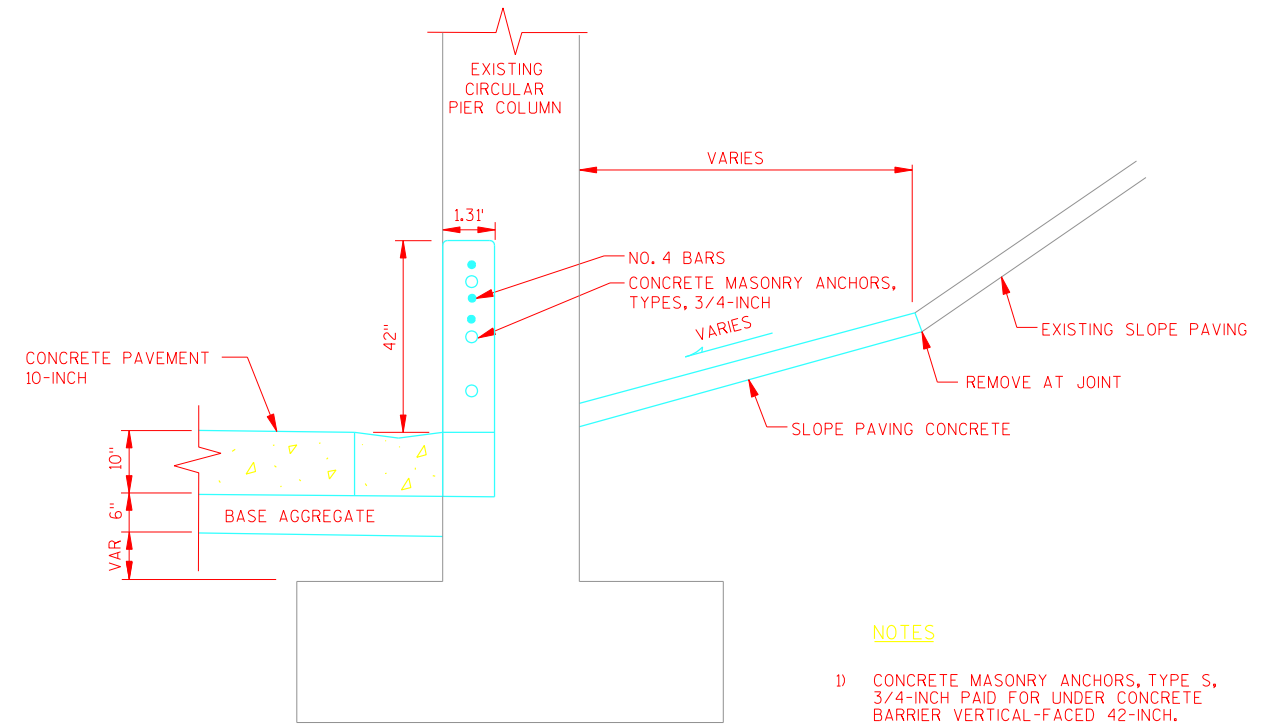

SECTION A-A


NOTES

- 1) CONCRETE MASONRY ANCHORS, TYPE S, 3/4-INCH PAID FOR UNDER CONCRETE BARRIER VERTICAL-FACED 42-INCH.
- 2) USE 2" MINIMUM BAR CLEARANCE UNLESS NOTED OTHERWISE.

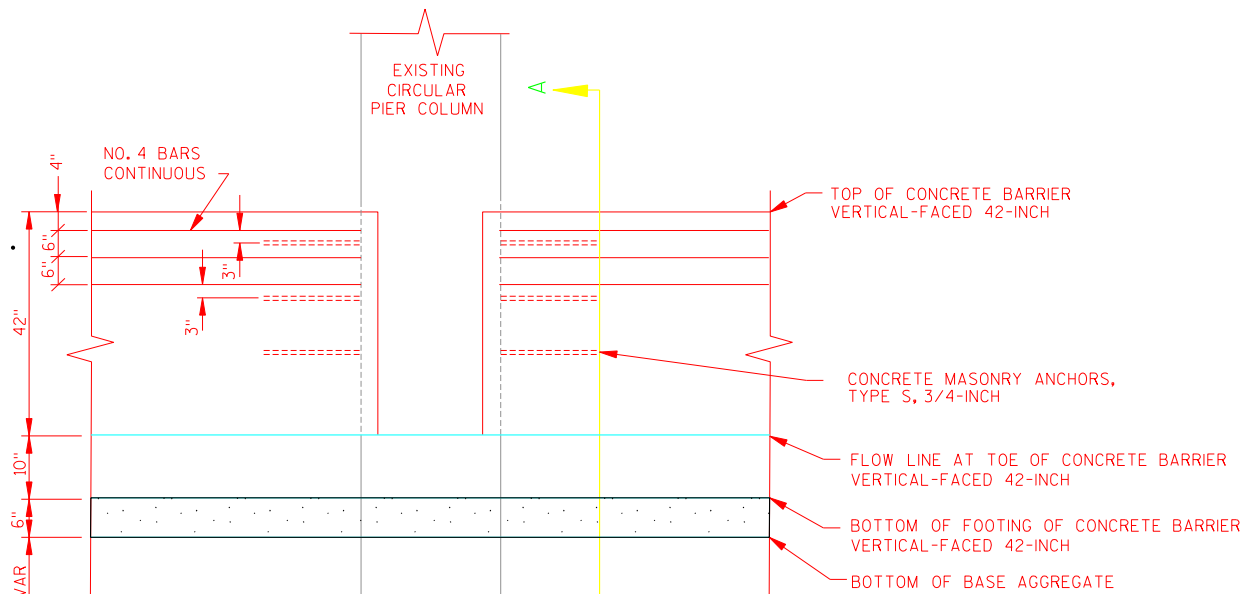

ELEVATION

ELEVATION

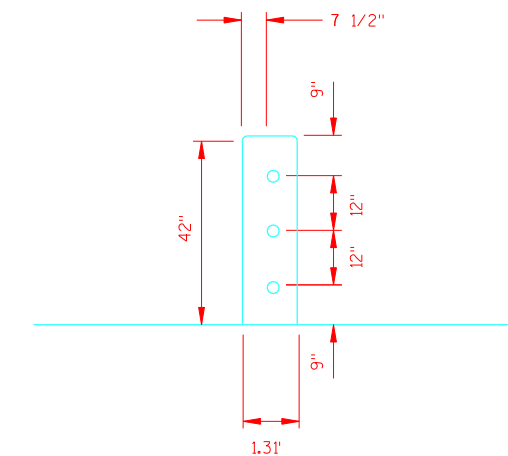

CONCRETE MASONRY ANCHORS LAYOUT

NOTES

- 1) CONCRETE MASONRY ANCHORS, TYPE S, 3/4-INCH PAID FOR UNDER CONCRETE BARRIER VERTICAL-FACED 42-INCH.
- 2) USE 2" MINIMUM BAR CLEARANCE UNLESS NOTED OTHERWISE.
- 3) DO NOT CUT OR DRILL INTO EXISTING COLUMN BAR STEEL.

CONCRETE BARRIER VERTICAL-FACED 42-INCH

STA 130+06-STA 131+75, RT  
STA 130+15-STA 131+82, LT