
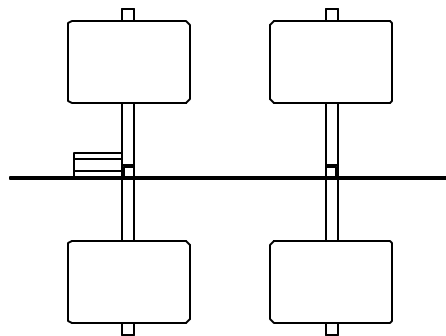
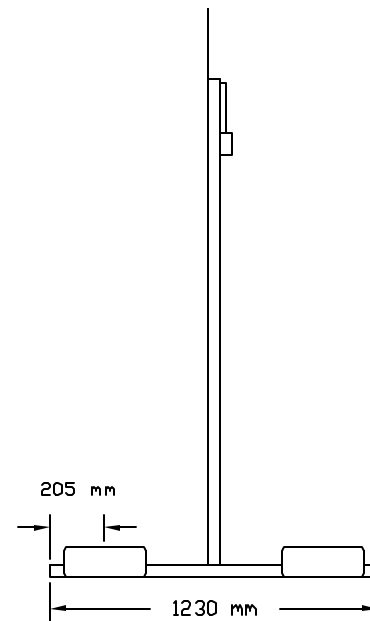


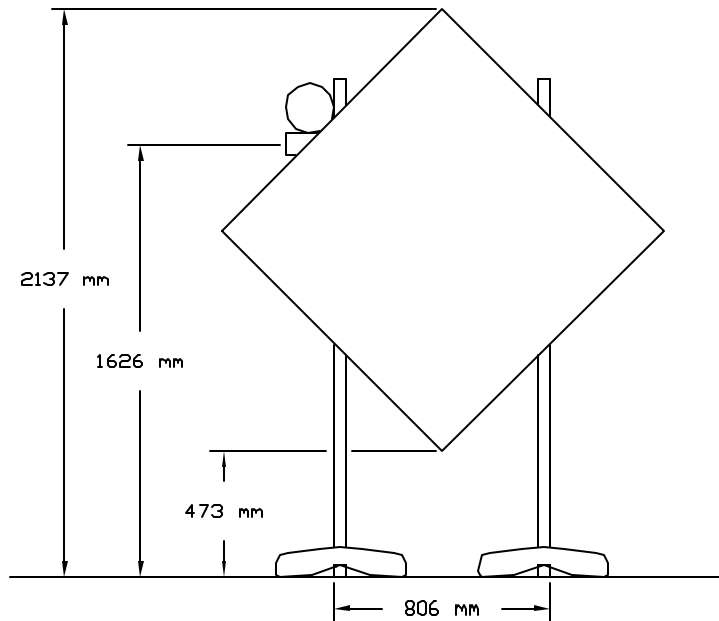

ALUMINUM TEMPORARY SIGN SUPPORT SYSTEM

- * Vertical Upright Masts – 44.51 mm x 44.50 mm x 2.05 mm wall x 1829 mm long telespar galvanized steel
- * Legs, Horizontal Portion – 44.42 mm x 44.42 mm x 2.72 mm wall x 1230 mm long telespar galvanized steel
- * Legs, Vertical Portion – 38.11 mm x 38.06 mm x 2.75 mm wall x 302 mm long telespar galvanized steel
- * All telespar steel tubing contain 10.72 mm diameter punched holes, spaced 25.13 mm on center, along the total length
- * Vertical portion of leg is welded to horizontal portion on all four sides
- * Masts slide outside vertical portion of legs -- No bolt or fastening device used
- * Panel – Reflective aluminum, 1219 mm wide x 1219 mm long with a 2.95 mm thickness
- * Panel fastened to vertical mast supports with 7.9 mm x 57.2 mm pan head bolts
- * Light – Will Industries, Inc Flashing Warning Light attached to the sign panel
- * Ballast – 20.4-kg sandbag at end of each leg