




SECTION A-A
Lifting Slot




CHAMFER DETAIL

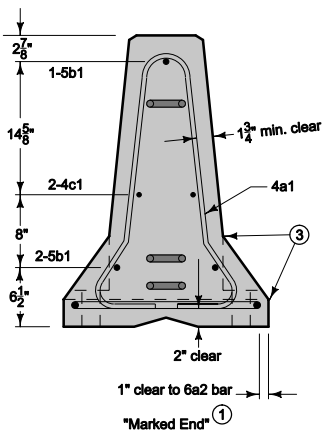


SECTION B-B
Stirrup Placement

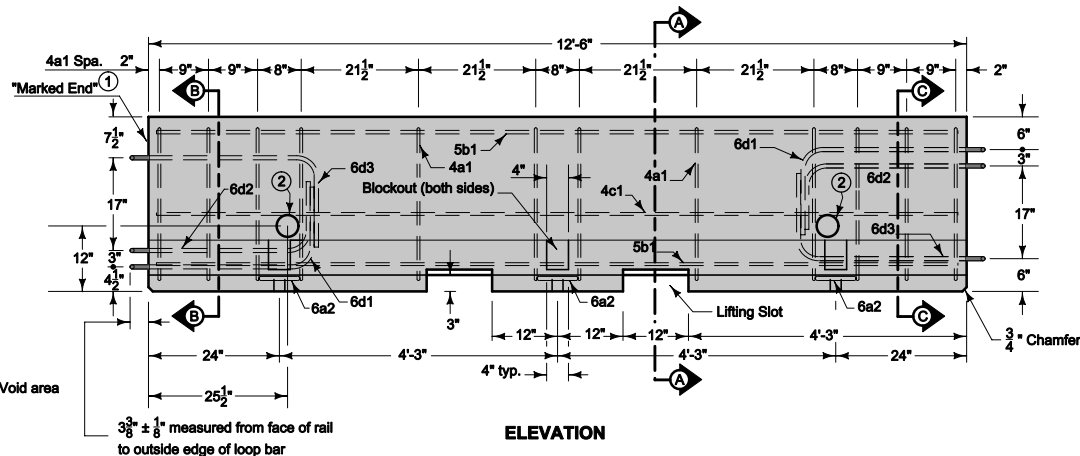


ELEVATION

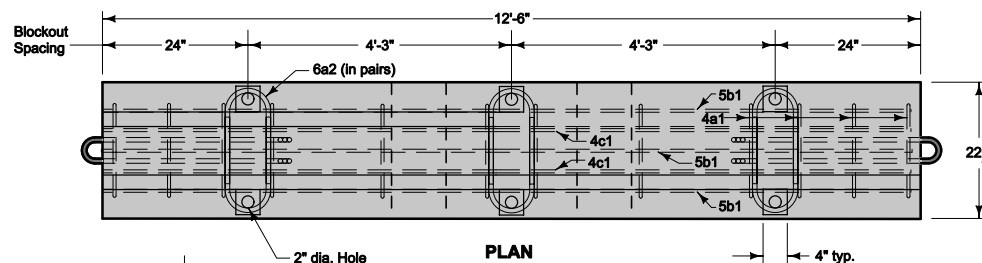

PLAN

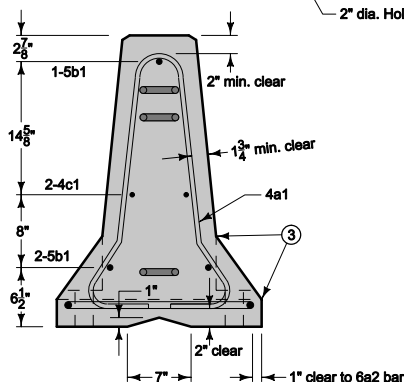

SECTION C-C
Stirrup Placement

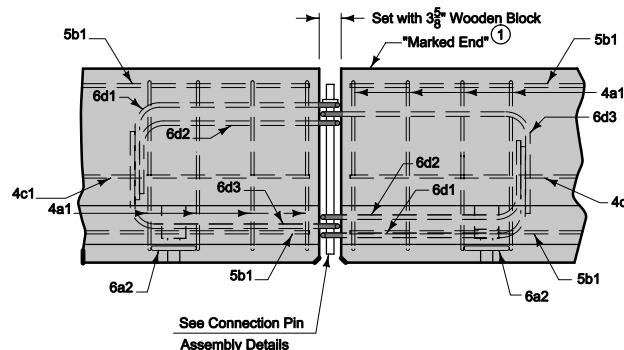

BARRIER CONNECTION
(Elevation)

For loop bars 6d1, 6d2, and 6d3, use $\frac{3}{8}$ " smooth steel bars with a minimum yield strength of 60 ksi, a tensile strength of not less than 1.25 times the yield strength but a minimum of 80 ksi, a minimum 14% elongation in 8 inches, and passing a 180 degree bend test using a $\frac{3}{2}$ " pin bend diameter.

Install loops within $\frac{1}{8}$ " of the plan dimensions.

Use Grade 60, ASTM A615 for all other reinforcements. Do not lift or move using loop bars 6d1, 6d2 or 6d3.

Provide for an approved monitoring schedule with a person on call and available 24 hours a day, each day of the week, to realign barrier which has been struck. Initiate service within one hour of notification of need.

Unless stated otherwise in the plans, the barrier rail sections shall be the property of the Contractor. Remove from the site upon completion of work.

Following removal of anchorage, fill all holes with an approved non-shrink grout.

Tapered end section is not designed for use within 30 feet of traffic on facilities with speed limits 55 mph or greater, nor within 10 feet of traffic on facilities with speed limits 40 mph to 50 mph.

Estimated quantity of concrete for one taper section is 0.6 cubic yards.

Include the cost of anchorage, when required in the price bid for "Temporary Barrier Rail, Concrete".

① Permanently mark one end of each rail section with manufacturing information. The "marked end" is that end of the barrier having one loop bar at the top and two loop bars at the bottom. Include the following information in the marking:

- Manufacturer Identification
- Date Manufactured (Month and Year)
- BA-401 Type A


② Lifting hole, 4 inch diameter PVC Pipe.

③ 1 inch radius allowed.


Possible Contract Item:
Temporary Barrier Rail, Concrete

Possible Tabulation:
108-33

 Iowa Department of Transportation STANDARD ROAD PLAN	REVISION New 04-20-10	
	BA-401 SHEET 1 of 4	
REVISIONS: New. Replaces RE-71.		
APPROVED BY DESIGN METHODS ENGINEER <i>Deanna Mifflin</i>		
TEMPORARY BARRIER RAIL (PRECAST CONCRETE)		

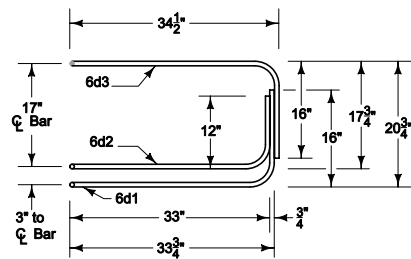


Elevation
(Marked end shown, invert for other end.)




Plan
6d1, 6d2, 6d3


BENT BAR DETAILS
(Dimensions are out to out of bars unless otherwise noted.)

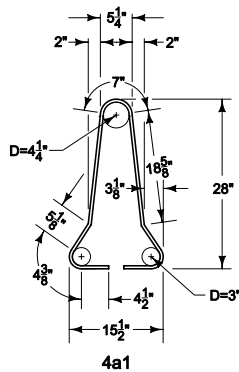


4a1



6a2



CONNECTION PIN
(A36 Steel - 10.9 lbs. each)


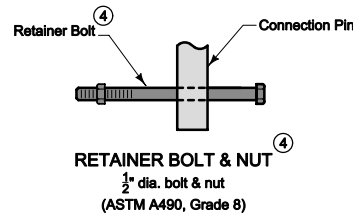


CONNECTION PIN ASSEMBLY

- ④ Retainer bolt & nut are required for connections with 2-loop barriers (previous designs) or in conjunction with Strap Anchorage.
- ⑤ Furnish and install Barrier Markers. Attach to the barrier in a manner approved by the manufacturer. Markers to face oncoming traffic and match the adjacent edge line in color. Maintain the markers and promptly repair or replace any damaged or missing units. Include costs for furnishing, installing and maintaining markers in the price bid for "Temporary Barrier Rail, Concrete."

Per 12'-6" Barrier Section

REINFORCING A615 Gr. 60					
Bar	Bar Size	Shape	No. of Bars	Length Ft.	Weight Lbs.
4a1	4		12	6'-0"	48.1
6a2	6		6	35"	26.3
5b1	5		3	12'-2"	38.1
4c1	4		2	12'-2"	16.3
LOOP ASSEMBLY					
6d1	6		2	8'-5"	25.3
6d2	6		2	7'-7"	22.8
6d3	6		2	8'-6"	25.5

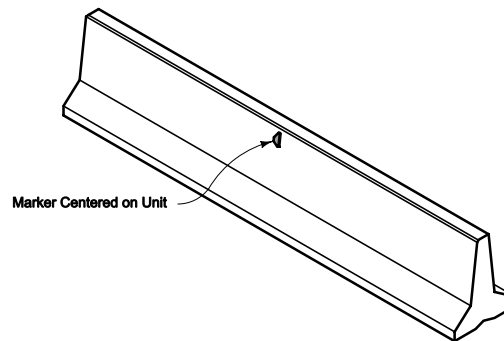


BARRIER MARKER PLACEMENT

⑤

<p>Iowa Department of Transportation</p> <p>STANDARD ROAD PLAN</p> <p>REVISIONS: New. Replaces RE-71.</p> <p><i>Deanna Mifflin</i> APPROVED BY DESIGN METHODS ENGINEER</p> <p>TEMPORARY BARRIER RAIL (PRECAST CONCRETE)</p>	<p>REVISION</p> <p>New 04-20-10</p>	
	<p>BA-401</p>	
	<p>SHEET 2 of 4</p>	
	<p></p>	

STRAP ANCHORAGE

For use on:
Bridge Decks
PCC Pavement

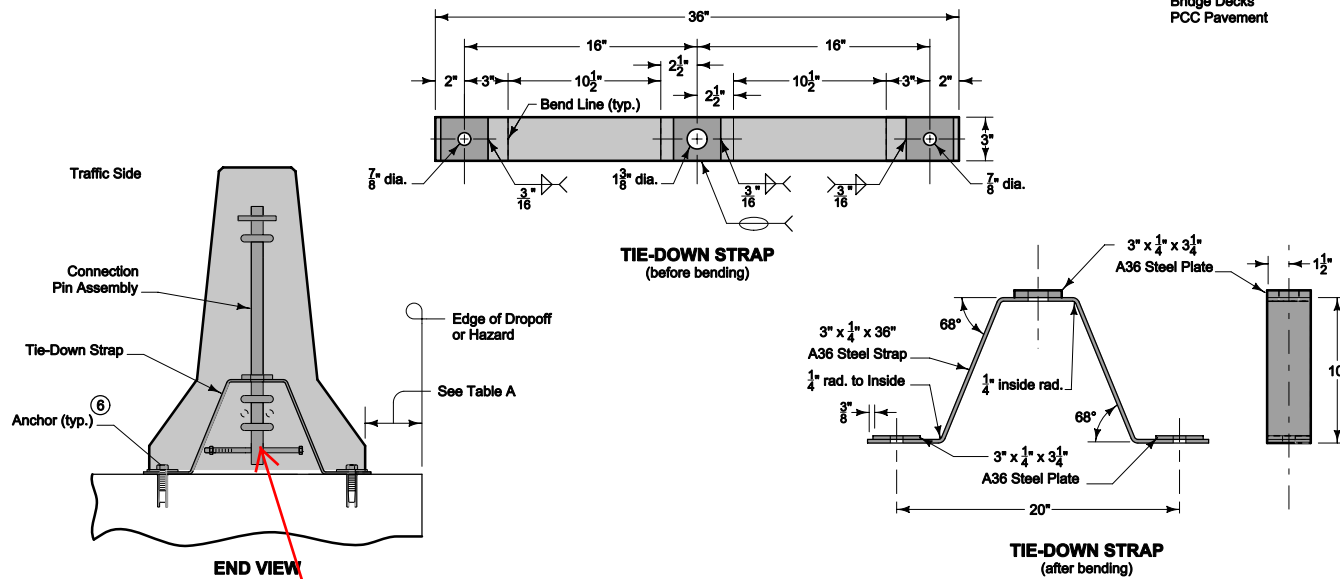

- (6) 3/4 inch Red Head Multi-Set II drop-in anchor with 3/4 inch dia. x 1 3/4 inch long ASTM A325 structural bolt OR Red Head Large Diameter Tapcon (3/4 inch dia. x 4 1/2 inch min.) OR Simpson Titen HD Wedge Bolt (3/4 inch dia. x 5 inch min.).
- (7) 3 stakes required per rail section.
- (8) Pre-drill holes for stakes with 1 5/8 inch core bit.

STAKE ANCHORAGE

For use on:
HMA Pavement (2" min. thickness)
Composite Pavement (8)
PCC Pavement (8)

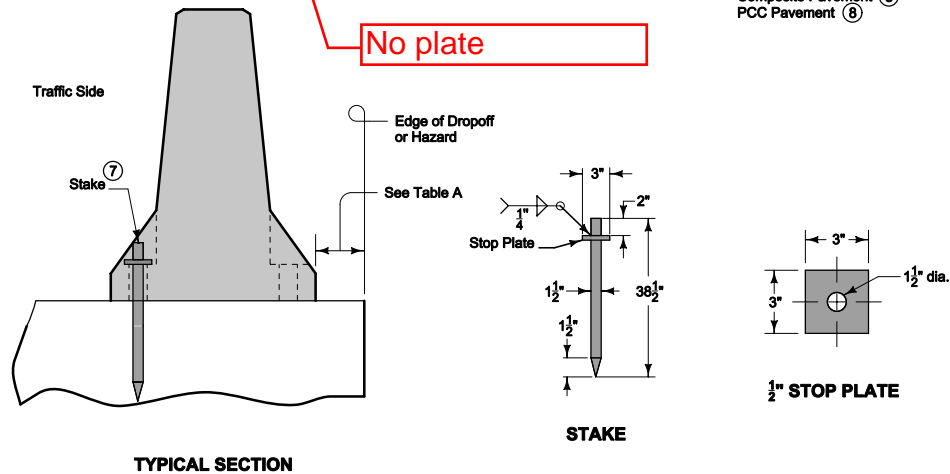



TABLE A
ANCHORAGE REQUIREMENTS

Hazard	Dropoff	Min. offset where TBR is Unanchored	Min. offset where TBR is Anchored
Dropoff from pavement	≤ 24"	24"	6"
	> 24"	45"	6"
Dropoff from bridge	≤ 3"	1"	N/A
	> 3"	45"	6"
Fixed vertical object	N/A	24"	6"


 Iowa Department of Transportation	REVISION	
	New	04-20-10
	STANDARD ROAD PLAN	
REVISIONS: New. Replaces RE-71.		BA-401
APPROVED BY DESIGN METHODS ENGINEER		SHEET 3 of 4

TEMPORARY BARRIER RAIL
(PRECAST CONCRETE)


TAPERED END SECTION

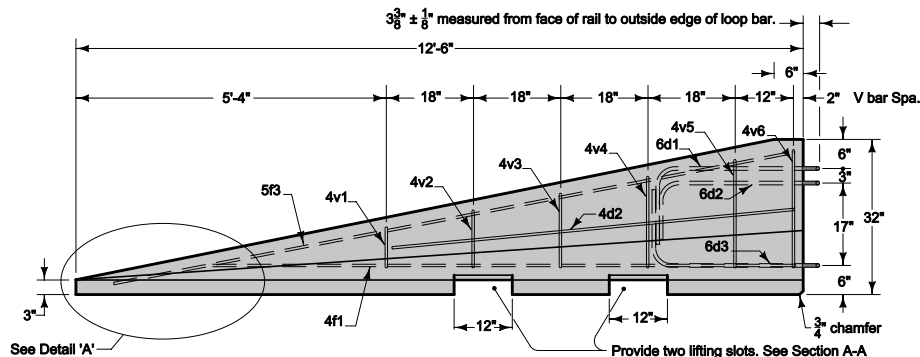


SIDE ELEVATION
(For connection to "marked end" of barrier.
Invert loop bars for other end.)

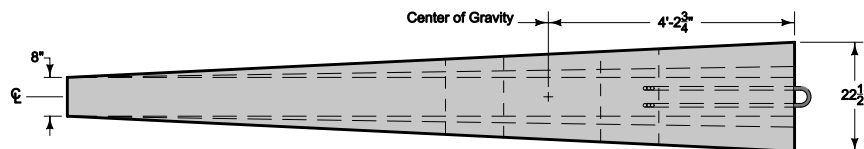


PLAN




DETAIL 'A'

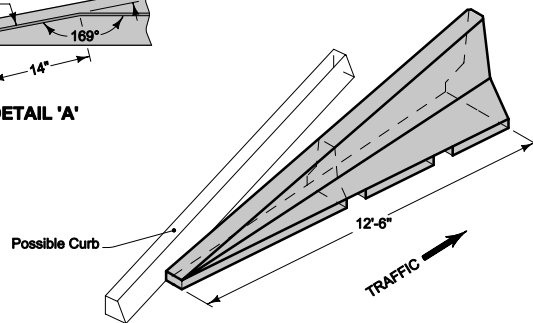

PERSPECTIVE VIEW




FRONT ELEVATION

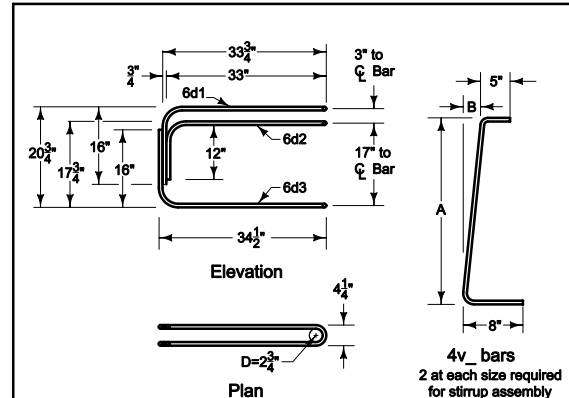

BENT BAR DETAILS
(Connection to "Marked End" shown,
invert for other end)

BENT BAR DETAILS
(Dimensions are out to out of bars unless otherwise noted.)



END SECTION

③ 1 inch radius allowed.

Per 12'-6" Barrier Taper Section

REINFORCING A615 Gr. 60					
Bar	Bar Size	Shape	No. of Bars	Length ft.	Weight lbs.
4v1	4	[Diagram]	2	23"	2.6
4v2	4	[Diagram]	2	28"	2.9
4v3	4	[Diagram]	2	30"	3.3
4v4	4	[Diagram]	2	33"	3.7
4v5	4	[Diagram]	2	3'-2"	4.2
4v6	4	[Diagram]	2	3'-4"	4.5
4f1	4	[Diagram]	2	12'-0"	18.0
4f2	4	[Diagram]	2	7'-6"	10.0
5f3	5	[Diagram]	1	11'-9"	12.3

LOOP ASSEMBLY

Bar	Bar Size	Shape	No. of Bars	Length ft.	Weight lbs.
6d1	6	[Diagram]	1	8'-5"	12.6
6d2	6	[Diagram]	1	7'-7"	11.4
6d3	6	[Diagram]	1	8'-6"	12.8

Bar	A	B
4v1	10"	1"
4v2	13"	1 1/4"
4v3	17"	1 5/8"
4v4	20"	1 1/2"
4v5	24 1/2"	2 3/8"
4v6	27"	2 3/4"

Iowa Department of Transportation

REVISION

New	04-20-10
-----	----------

STANDARD ROAD PLAN

REVISIONS: New. Replaces RE-71.

APPROVED BY DESIGN METHODS ENGINEER

Deanna McFadden

BA-401

SHEET 4 of 4

TEMPORARY BARRIER RAIL

(PRECAST CONCRETE)