



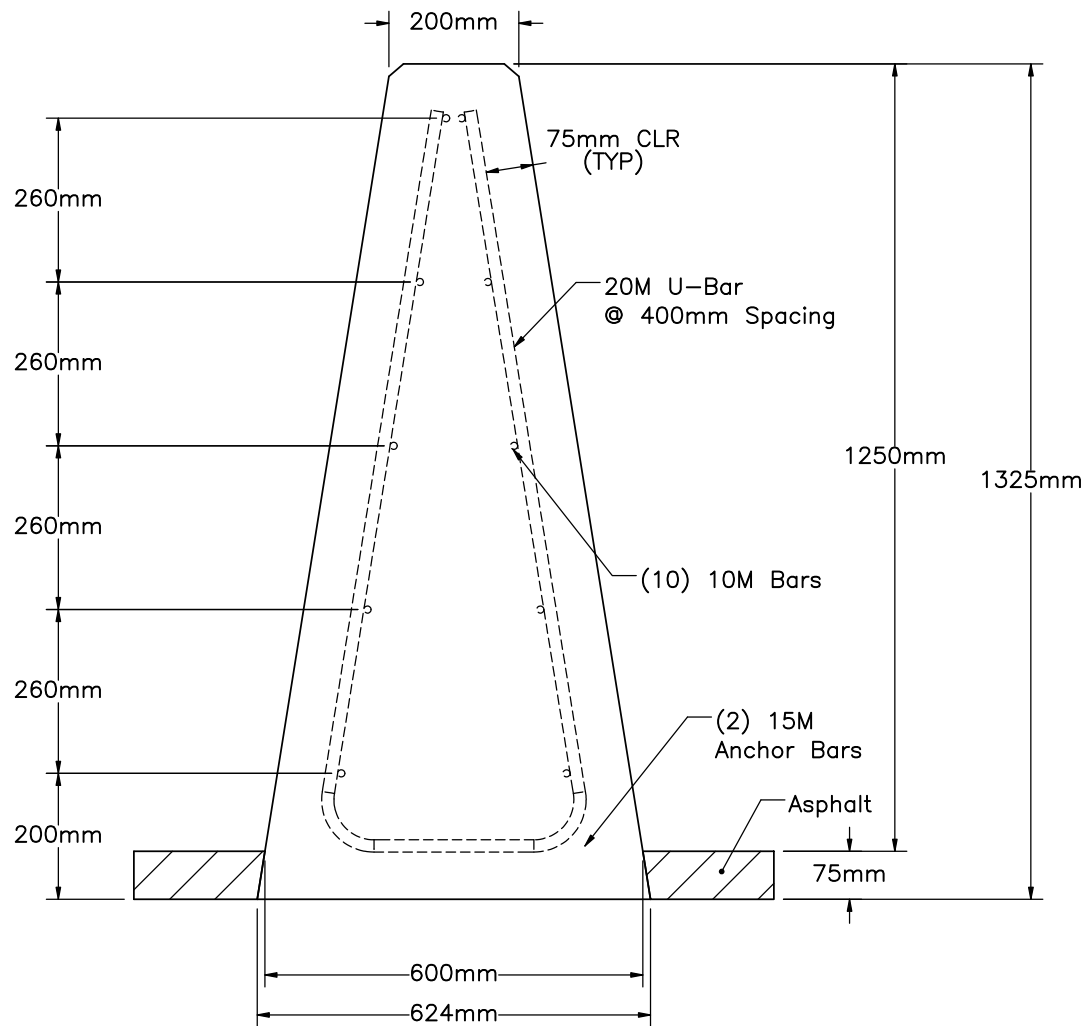

INTERIOR SECTION

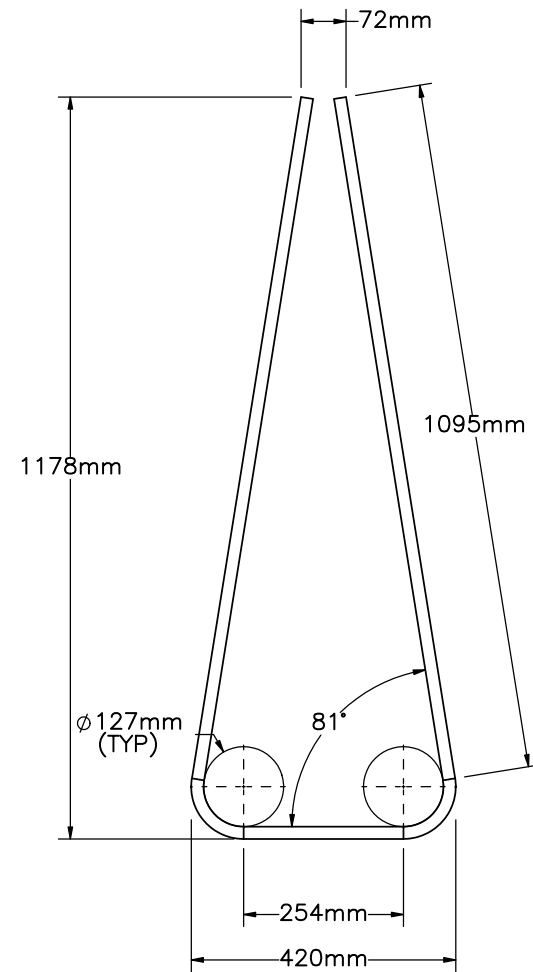

20M U-Bar

Notes:

- (1) Elongated U-Bar (Stirrup) required for asphalt anchorage configuration due to increased height of barrier. Unbent Length = 2.698m.
- (2) 75mm clear cover for all rebar.
- (3) $f'_c = 45\text{MPa}$
- (4) Rebar Steel Grade 400W, $f_y = 400\text{MPa}$

- (5) Single 15M bar at top may be used to replace (2) 10M bars.
- (6) End sections need anchorage to concrete slab/foundation.