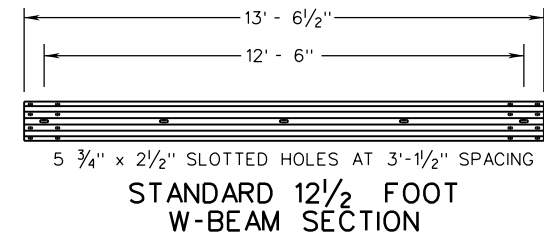
**NOTES:**

1. TRANSITIONS FROM 31" GR-MGS1 TO 27³/₄" GR-2 SHALL BE ACCOMPLISHED WITH 2 STANDARD 12¹/₂ FOOT SECTIONS OF W-BEAM.
2. POSTS, BLOCKOUTS, AND SPLICES SHALL BE IN ACCORDNCE WITH THE GR-MGS1 STANDARD AND LOCATED AS SHOWN IN THE DETAILS ABOVE.
3. STANDARD 6 FOOT POSTS SHALL BE USED UNLESS OTHERWISE NOTED ON PLANS
4. STANDARD GR-MGS1 TRANSITION SHALL BE PAID FOR AS EACH COMPLETE IN PLACE.
5. END TERMINAL SHALL BE A VDOT APPROVED PRODUCT MEETING MASH TESTING CRITERIA. ANY TERMINAL USED SHALL BE FROM THE VDOT APPROVED PRODUCTS LIST.

SPECIFICATION
REFERENCE221
236
505

MIDWEST GUARDRAIL SYSTEM
(TRANSITION FROM MGS 31" HEIGHT TO GR-2 27³/₄" HEIGHT)
 VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT

ROAD AND BRIDGE STANDARDS

REVISION DATE

SHEET 1 OF 1

506.---